



MMI

PIN HEADER
PITCH: 1.27x1.27mm

1.27x1.27 mm PIN HEADER STRAIGHT TYPE - P

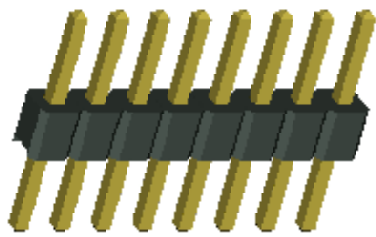


1ROW

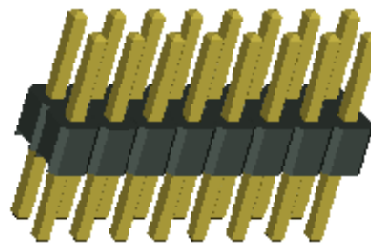

2ROW

STRAIGHT TYPE

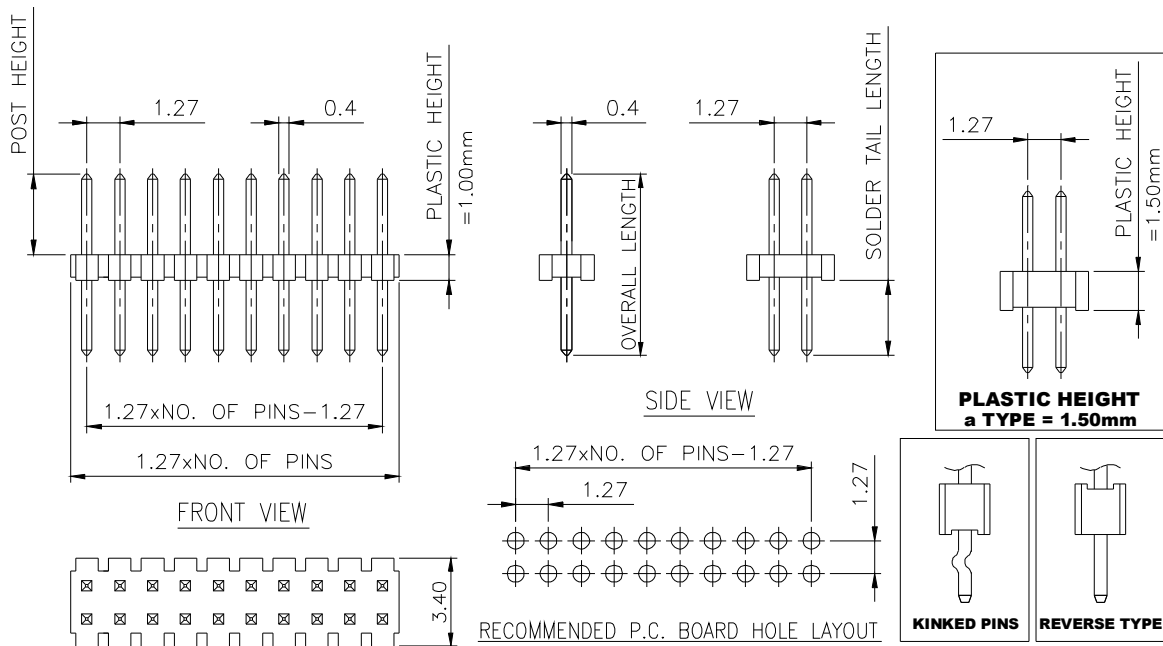

PH	d	XXXX	X	X	-	P	##	0X	GX	-	XXXX	-	X
PIN HEADER	SERIES NO. OVERALL LENGTH = XX.XXmm					PCB TYPE P: STRAIGHT TYPE	NO. OF ROW 01,02				KINKED PINS K: WITH KINKED PINS BLANK: STANDARD PINS		
PITCH 1.27x1.27 mm						PLASTIC TYPE BLANK: STANDARD PLASTIC TYPE r: REVERSE PLASTIC TYPE	NO. OF PINS PER ROW				POST HEIGHT, =XX.XXmm		
						PLASTIC HEIGHT BLANK: STANDARD HEIGHT, 1.00mm a: PLASTIC HEIGHT, 1.50mm c: PLASTIC HEIGHT, 2.00mm e: PLASTIC HEIGHT, 2.50mm					CONTACT PLATING OPTION Gf: GOLD FLASH Gt: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL		

SPECIFICATIONS


CURRENT RATING : 1 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : NYLON-6T ,UL94V-0
 FINISH : GOLD FLASH

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm PIN HEADER RIGHT ANGLE TYPE - Pa



1ROW



2ROW

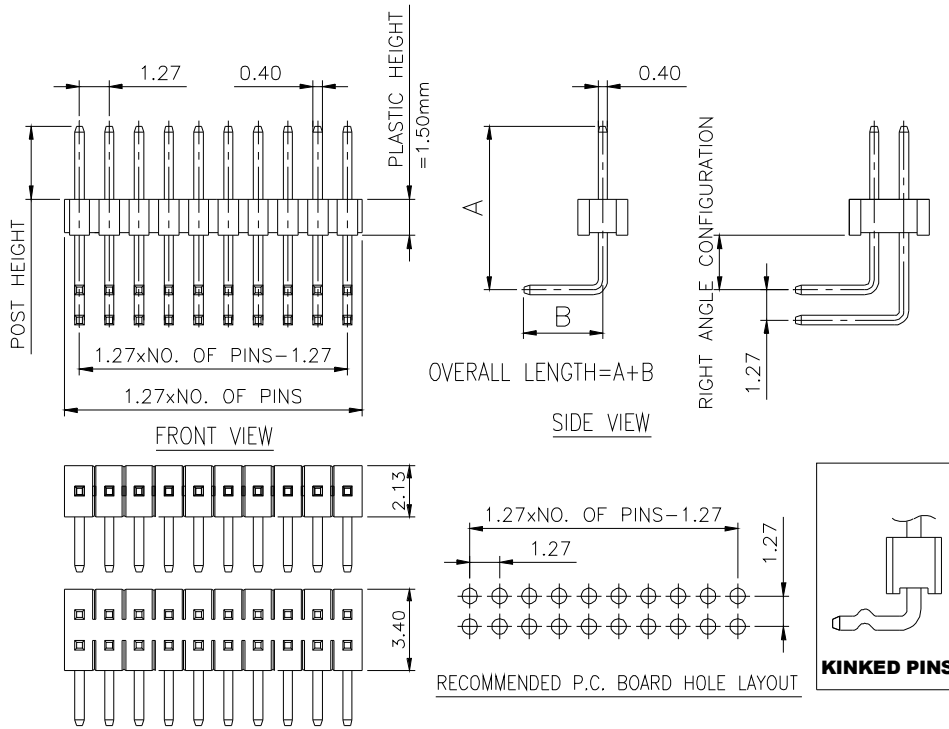

PH PIN HEADER
d PITCH 1.27x1.27 mm
XXXX SERIES NO.
 OVERALL LENGTH = A+B= XX.XXmm
Pa PCB TYPE
 Pa: RIGHT ANGLE TYPE
NO. OF PINS PER ROW
0X NO. OF ROW
 01,02
GX CONTACT PLATING OPTION
X RIGHT ANGLE CONFIGURATION
 A: A TYPE, 1.00mm
 E: E TYPE, 1.50mm
 BLANK: OPTION
XXXX POST HEIGHT, =XX.XXmm
X KINKED PINS
 K: WITH KINKED PINS
 BLANK: STANDARD PINS

SERIES NO.	OVERALL LENGTH	POST HEIGHT
001	9.18	3.05
0968	9.68	3.18

CONTACT PLATING OPTION
 Gf: GOLD FLASH
 Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 1 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : NYLON 6T
 FINISH : GOLD FLASH

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm PIN HEADER SURFACE MOUNT TYPE - Pt

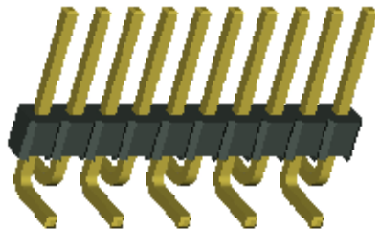


1ROW

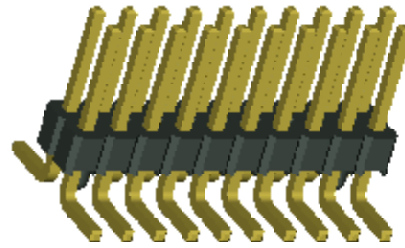

2ROW

SURFACE MOUNT TYPE

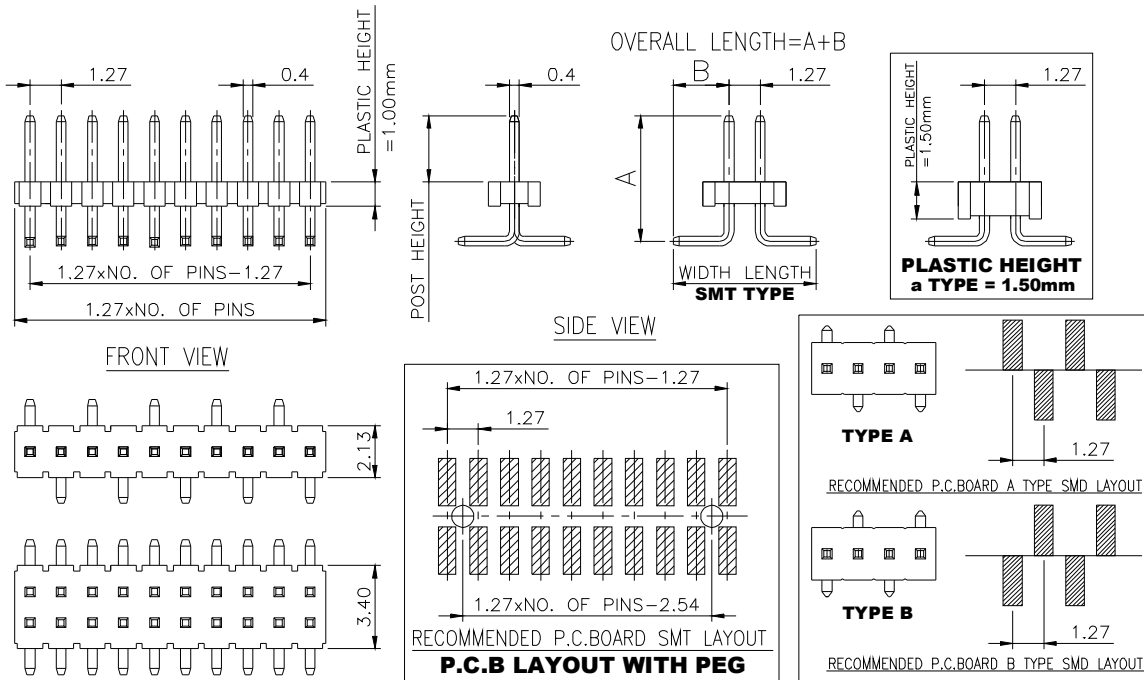

PH	d	XXXX	X	-	Pt	X	##	0X	GX	-	XXXX	-	X	XX																																							
PIN HEADER	SERIES NO. OVERALL LENGTH	PCB TYPE Pt: SURFACE MOUNT TYPE	NO. OF ROW 01, 02	POST HEIGHT = XX.XX mm	NO. OF PINS PER ROW	CONTACT PLATING OPTION	PEG OPTION P: WITH PEG BLANK: WITHOUT PEG	CAP OPTION CP: WITH CAP BLANK: WITHOUT CAP																																													
PITCH 1.27X1.27mm	PLASTIC HEIGHT BLANK: STANDARD HEIGHT, 1.00mm a: PLASTIC HEIGHT, 1.50mm c: PLASTIC HEIGHT, 2.00mm e: PLASTIC HEIGHT, 2.50mm	SMD TYPE (ONLY SINGLE ROW) A: TYPE A B: TYPE B (ONLY DOUBLE ROW) A: TYPE A, 5.10mm B: TYPE B, 4.20mm																																																			
<table border="1"> <thead> <tr> <th>SERIES NO.</th> <th>OVERALL LENGTH</th> <th>POST HEIGHT</th> </tr> </thead> <tbody> <tr><td>001</td><td>6.47</td><td>3.05</td></tr> <tr><td>002</td><td>5.33</td><td>1.91</td></tr> <tr><td>003</td><td>5.07</td><td>1.65</td></tr> <tr><td>004</td><td>7.23</td><td>3.81</td></tr> <tr><td>006</td><td>7.42</td><td>3.00</td></tr> <tr><td>563</td><td>7.55</td><td>5.10</td></tr> <tr><td>563</td><td>7.10</td><td>4.20</td></tr> <tr><td>0731</td><td>8.91</td><td>4.90</td></tr> <tr><td>0791</td><td>8.12</td><td>3.00</td></tr> <tr><td>1112</td><td>12.72</td><td>8.71</td></tr> <tr><td>1368</td><td>14.11</td><td>8.70</td></tr> <tr><td>1529</td><td>14.02</td><td>8.70</td></tr> </tbody> </table>	SERIES NO.	OVERALL LENGTH	POST HEIGHT	001	6.47	3.05	002	5.33	1.91	003	5.07	1.65	004	7.23	3.81	006	7.42	3.00	563	7.55	5.10	563	7.10	4.20	0731	8.91	4.90	0791	8.12	3.00	1112	12.72	8.71	1368	14.11	8.70	1529	14.02	8.70														
SERIES NO.	OVERALL LENGTH	POST HEIGHT																																																			
001	6.47	3.05																																																			
002	5.33	1.91																																																			
003	5.07	1.65																																																			
004	7.23	3.81																																																			
006	7.42	3.00																																																			
563	7.55	5.10																																																			
563	7.10	4.20																																																			
0731	8.91	4.90																																																			
0791	8.12	3.00																																																			
1112	12.72	8.71																																																			
1368	14.11	8.70																																																			
1529	14.02	8.70																																																			
<p>DETAIL OF CAP</p> <p>PEG</p>																																																					

SPECIFICATIONS


CURRENT RATING : 1 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : NYLON-6T UL 94V-0
 FINISH : GOLD FLASH

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm PIN HEADER RIGHT ANGLE SURFACE MOUNT TYPE - Rt

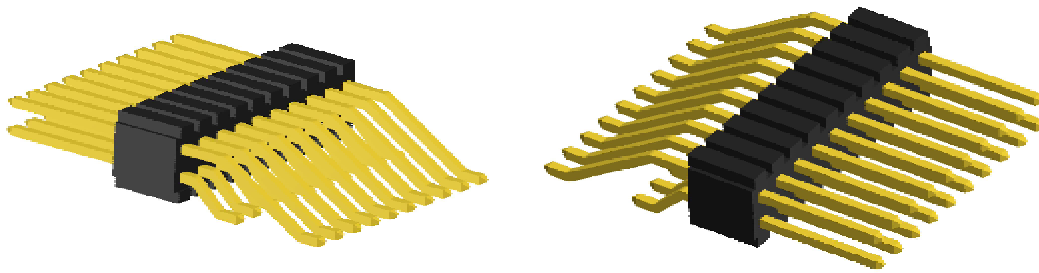

RIGHT ANGLE SURFACE MOUNT TYPE

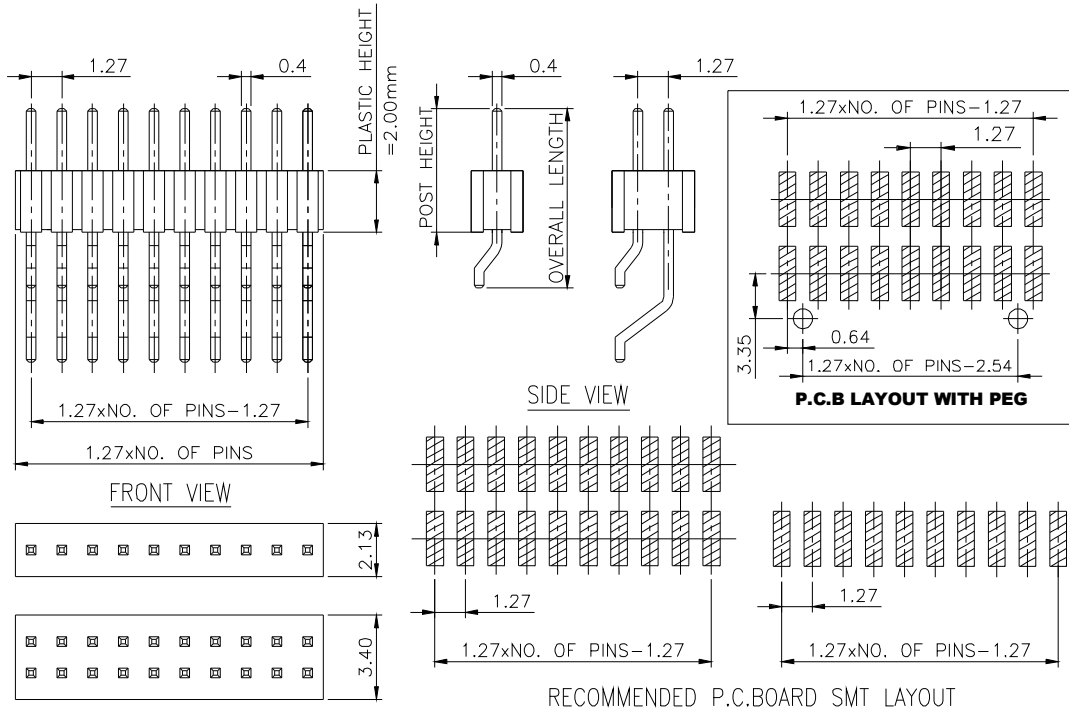

RECOMMENDED P.C.BOARD SMT LAYOUT

PH	d	XXXX	X	Rt	##	OX	GX	XXXX	X	XX
PIN HEADER	PITCH 1.27x1.27 mm	SERIES NO. OVERALL LENGTH = XX.XXmm	PLASTIC HEIGHT BLANK: STANDARD HEIGHT, 1.00mm a: PLASTIC HEIGHT, 1.50mm b: PLASTIC HEIGHT, 3.30mm c: PLASTIC HEIGHT, 2.00mm e: PLASTIC HEIGHT, 2.50mm	PCB TYPE Rt: RIGHT ANGLE SURFACE MOUNT TYPE	NO. OF ROW 01,02	NO. OF PINS PER ROW	CONTACT PLATING OPTION Gf: GOLD FLASH Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL	POST HEIGHT, =XX.XXmm	CAP OPTION OP: WITH CAP BLANK: WITHOUT CAP	PEG OPTION P: WITH PEG BLANK: WITHOUT PEG

SERIES NO.	OVERALL LENGTH	POST HEIGHT
1075	10.75	3.00
1145	11.45	3.70

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : NYLON-6T UL 94V-0
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING
 MAX. PROCESSING TEMP:
 230° FOR 30-60 SECONDS (260° FOR 10 SECONDS)

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm STACK PIN HEADER STRAIGHT TYPE - P




1 ROW



2 ROW

STRAIGHT TYPE

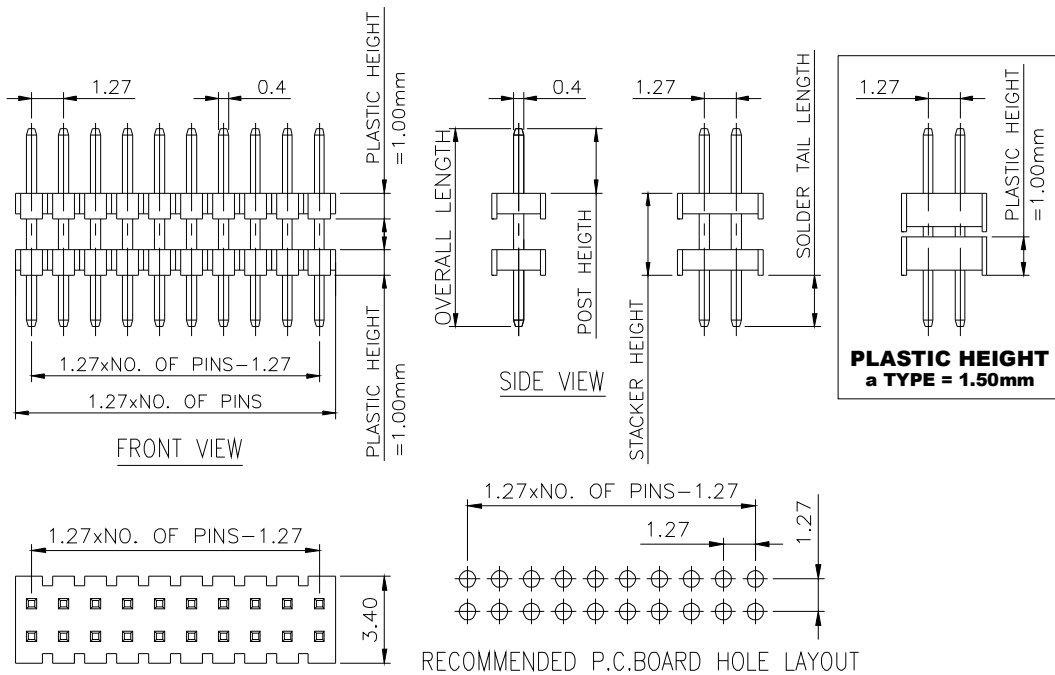

SPH - STACK PIN HEADER
d - PITCH 1.27x1.27 mm
XXXX - SERIES NO. OVERALL LENGTH = XX.XXmm
X - PCB TYPE P: STRAIGHT TYPE
P - NO. OF ROW 01,02
- NO. OF PINS PER ROW
OX - PLASTIC HEIGHT
GX - CONTACT PLATING OPTION
XXXX - STACKER HEIGHT, =XX.XXmm
XXXX - POST HEIGHT, =XX.XXmm

SERIES NO.	OVERALL LENGTH	POST HEIGHT	STACKER HEIGHT
0750	7.50	3.05	2.05
0870	8.70	3.00	3.70
1020	10.20	3.80	4.10
1029	10.29	3.30	4.70
1070	10.70	3.00	5.70
1080	10.80	3.81	4.06
1160	11.60	6.00	3.00
1340	13.40	3.00	8.40
1619	16.19	3.00	11.19
1644	16.44	3.00	11.19

PLASTIC HEIGHT
 BLANK: PLASTIC HEIGHT, 1.00mm
 a: PLASTIC HEIGHT, 1.50mm
 c: PLASTIC HEIGHT, 2.00mm
 e: PLASTIC HEIGHT, 2.50mm

CONTACT PLATING OPTION
 Gf: GOLD FLASH
 Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T / NYLON 6T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm STACK PIN HEADER RIGHT ANGLE TYPE - Pa




2 ROW



2 ROW
PLASTIC HEIGHT 1.50mm

RIGHT ANGLE TYPE

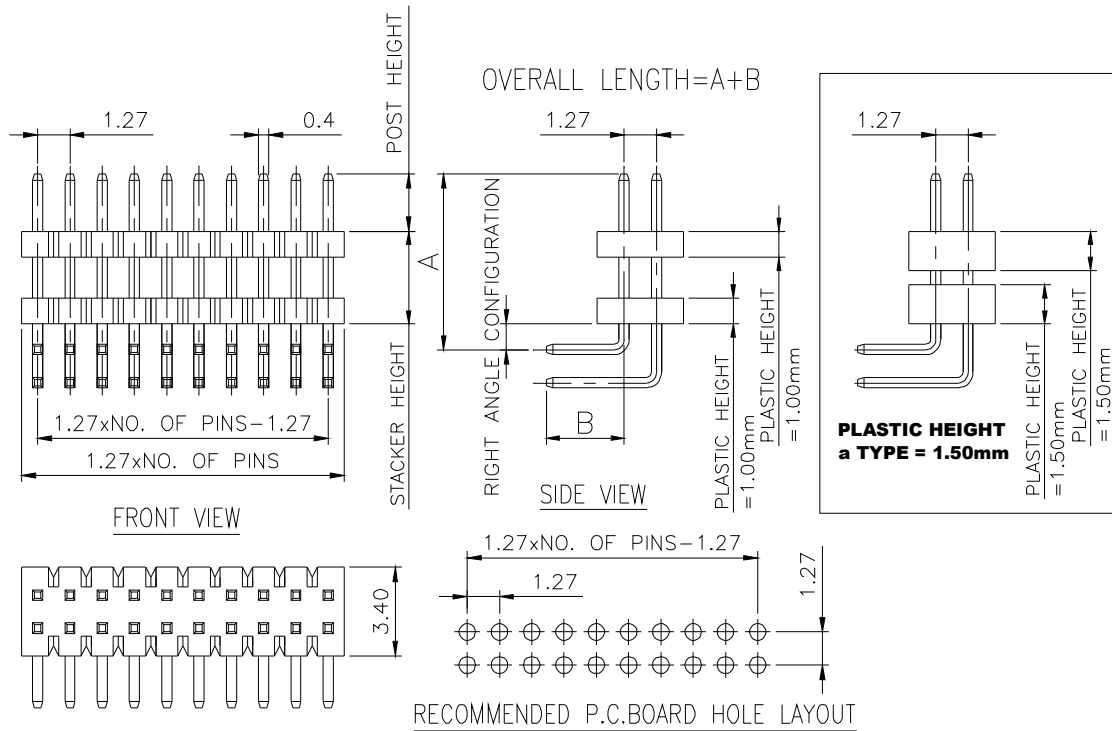

SPH - STACK PIN HEADER
d - PITCH 1.27x1.27 mm
XXXX - SERIES NO. OVERALL LENGTH = A+B= XX.XXmm
X - PCB TYPE Pa: RIGHT ANGLE TYPE
Pa - NO. OF ROW 01,02
- NO. OF PINS PER ROW
OX - PLASTIC HEIGHT
GX - CONTACT PLATING OPTION
XXXX - STACKER HEIGHT, =XX.XXmm
XXXX - POST HEIGHT, =XX.XXmm

SERIES NO.	OVERALL LENGTH	POST HEIGHT	STACKER HEIGHT
2427	24.27	3.20	15.00

PLASTIC HEIGHT
 BLANK: PLASTIC HEIGHT, 1.00mm
 a: PLASTIC HEIGHT, 1.50mm
 c: PLASTIC HEIGHT, 2.00mm
 e: PLASTIC HEIGHT, 2.50mm

CONTACT PLATING OPTION
 Gf: GOLD FLASH
 Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm STACK PIN HEADER SURFACE MOUNT TYPE - Pt



1 ROW




2 ROW



2 ROW
PLASTIC HEIGHT 1.50mm

SURFACE MOUNT TYPE

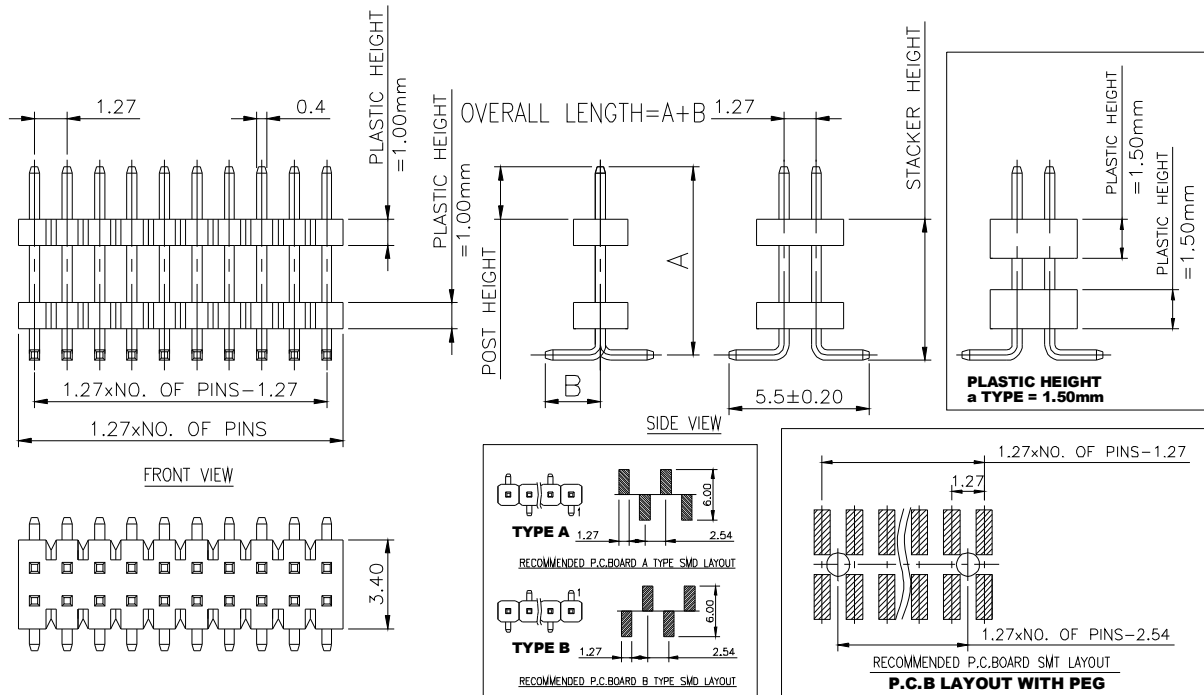

SPH d XXXX X - Pt X ## 0X GX - XXXX - XXXX - X XX

STACK PIN HEADER

SERIES NO.
OVERALL LENGTH = A + B = XX.XXmm

PCB TYPE
Pt: SURFACE MOUNT TYPE

NO. OF ROW
01, 02

STACKER HEIGHT = XX.XX mm

PEG OPTION
P: WITH PEG
BLANK: WITHOUT PEG

PITCH 1.27X1.27mm

PLASTIC HEIGHT
BLANK: STANDARD HEIGHT, 1.00mm
a: PLASTIC HEIGHT, 1.50mm
c: PLASTIC HEIGHT, 2.00mm
e: PLASTIC HEIGHT, 2.50mm

NO. OF PINS PER ROW



POST HEIGHT = XX.XX mm

CAP OPTION
CP: WITH CAP
BLANK: WITHOUT CAP

CONTACT PLATING OPTION

Gf: GOLD FLASH
Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SMD TYPE
(ONLY SINGLE ROW)
A: TYPE A
B: TYPE B



SERIES NO.	OVERALL LENGTH	POST HEIGHT	STACKER HEIGHT
800	10.28	2.54	5.46
900	10.92	3.00	6.00
0970	10.12	2.54	5.46
1170	13.82	5.70	6.00
1395	16.07	3.05	10.90
1815	20.27	3.00	15.15

SPECIFICATIONS





CURRENT RATING : 1 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS

INSULATOR MATERIAL : STANDARD : NYLON-6T UL 94V-0
FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING
MAX. PROCESSING TEMP:
230° FOR 30-60 SECONDS (260° FOR 10 SECONDS)

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm SHROUDED HEADER STRAIGHT TYPE - P

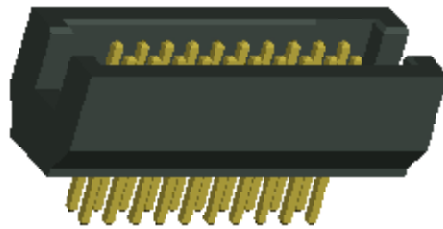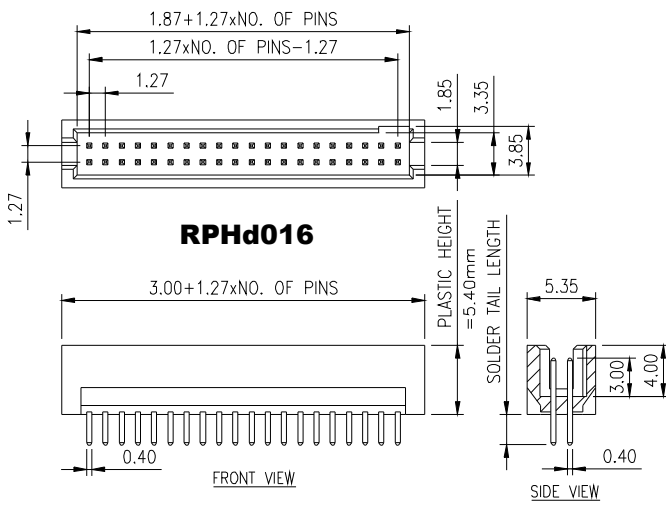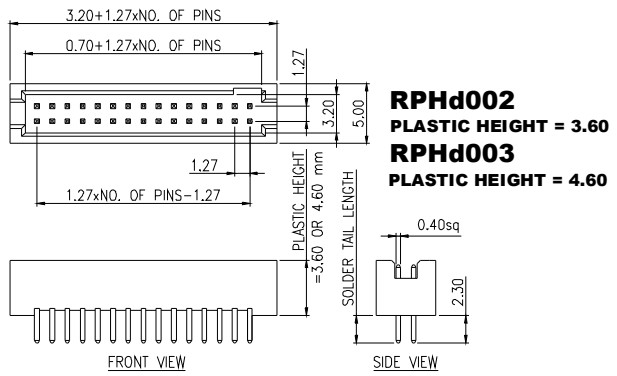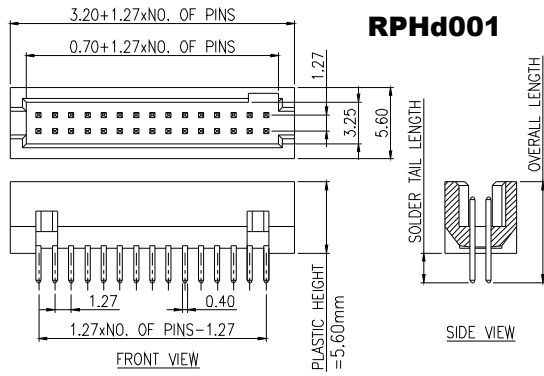

STRAIGHT TYPE

RPH	d	XXXX	P	##	02	GX
SHROUDED HEADER	PITCH 1.27x1.27 mm	SERIES NO. 001,002,003,016	PCB TYPE P: STRAIGHT TYPE	NO. OF PINS PER ROW	NO. OF ROW 02	CONTACT PLATING OPTION

RECOMMENDED P.C. BOARD HOLE LAYOUT

CONTACT PLATING OPTION

Gf: GOLD FLASH
 Gf1: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm SHROUDED HEADER STRAIGHT TYPE - P


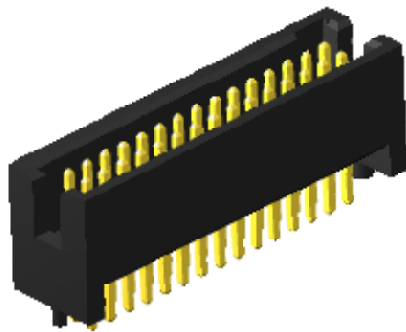


2 ROW

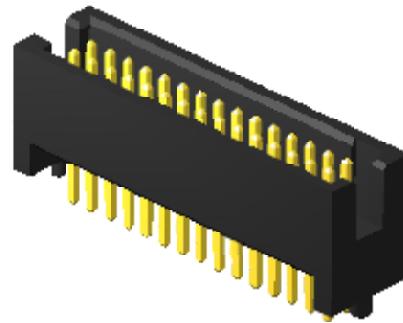

2 ROW

STRAIGHT TYPE

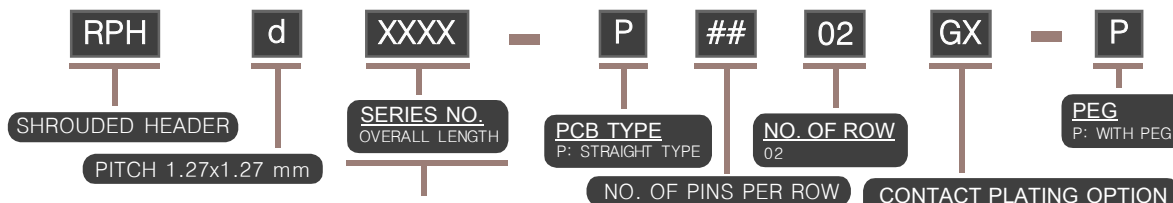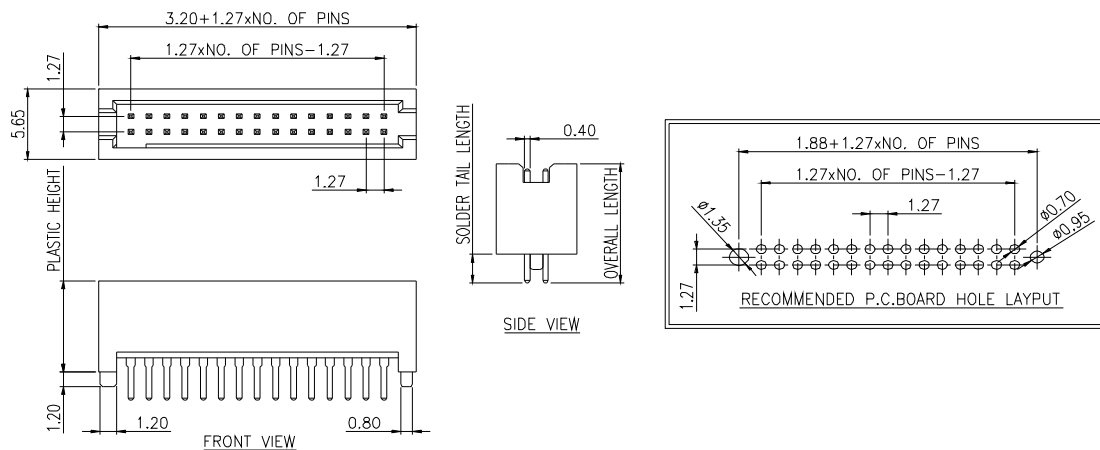

SERIES NO.	OVERALL LENGTH	PLASTIC HEIGHT	SERIES NO.	OVERALL LENGTH	PLASTIC HEIGHT
004	9.60	7.30	012	14.50	12.20
005	11.30	9.00	013	16.40	14.10
006	11.70	9.40	014	17.50	15.20
007	11.90	9.60	015	17.90	15.60
008	13.00	10.70	570	8.00	5.70
009	13.30	11.00	730	9.60	7.30
010	13.50	11.20	1120	13.62	11.20
011	13.70	11.50			

CONTACT PLATING OPTION

- Gf: GOLD FLASH
- Glt: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
- G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
- G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
- G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS



CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm SHROUDED HEADER RIGHT ANGLE TYPE - Pa

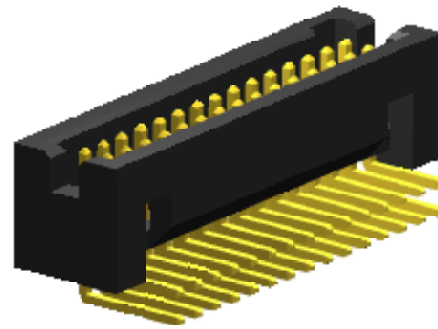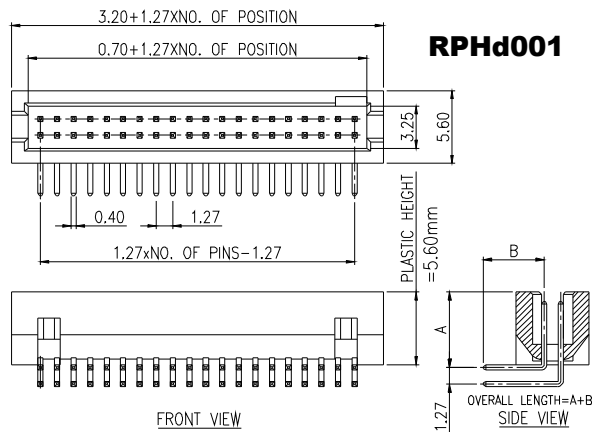

RPHd001

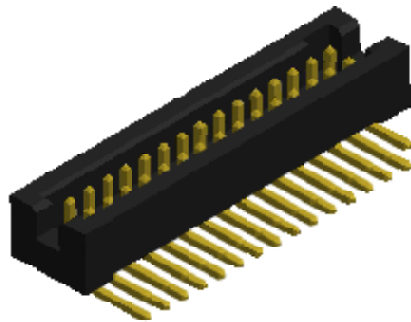

RPHd002
RPHd003

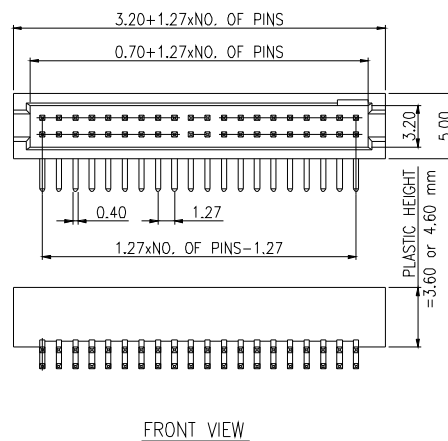

RPHd002
PLASTIC HEIGHT = 3.60
RPHd003
PLASTIC HEIGHT = 4.60

RPH	d	XXXX	-	Pa	##	02	GX
SHROUDED HEADER	PITCH 1.27x1.27 mm	SERIES NO. 001,002,003		PCB TYPE Pa: RIGHT ANGLE TYPE	NO. OF PINS PER ROW	NO. OF ROW 02	CONTACT PLATING OPTION
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <p style="text-align: center;">RECOMMENDED P.C.BOARD HOLE LAYOUT</p> </div>							
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <p>Gf: GOLD FLASH Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL</p> </div>							

SPECIFICATIONS



CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T
FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm SHROUDED HEADER SURFACE MOUNT TYPE - Pt

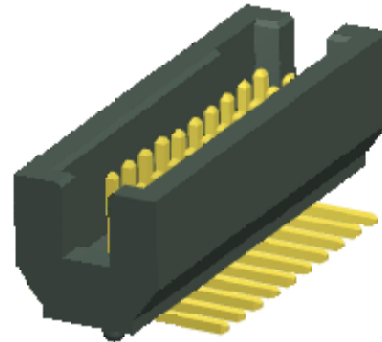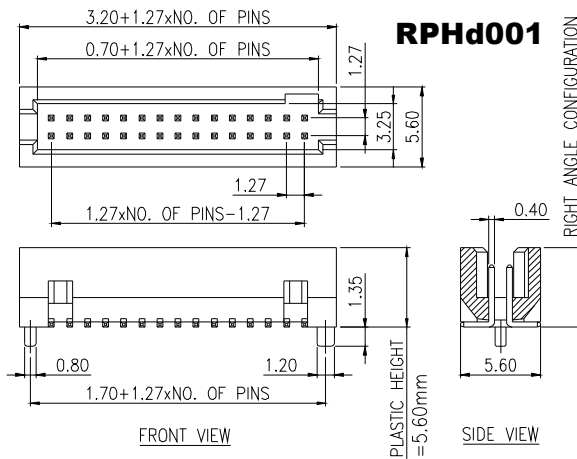


RPHd001

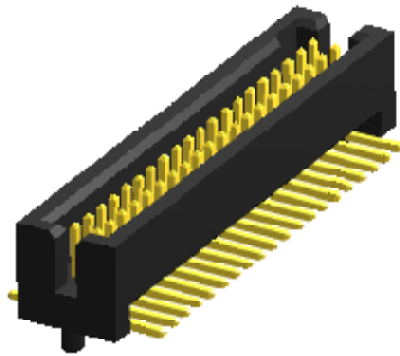

RPHd002
RPHd003

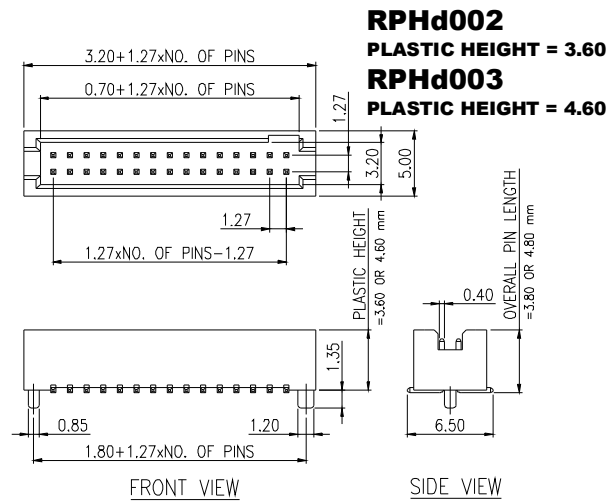

RPH	d	XXXX	Pt	##	02	GX	P
SHROUDED HEADER	PITCH 1.27x1.27 mm	SERIES NO. 001,002,003	PCB TYPE Pt: SURFACE MOUNT TYPE	NO. OF PINS PER ROW	NO. OF ROW 02	CONTACT PLATING OPTION	PEG P: WITH PEG

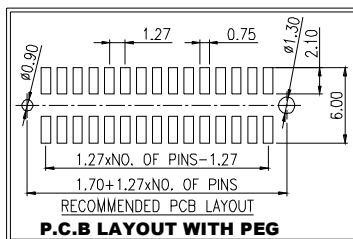

CONTACT PLATING OPTION

Gf: GOLD FLASH
Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : STANDARD : NYLON 6T
FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm SHROUDED HEADER SURFACE MOUNT TYPE - Pt

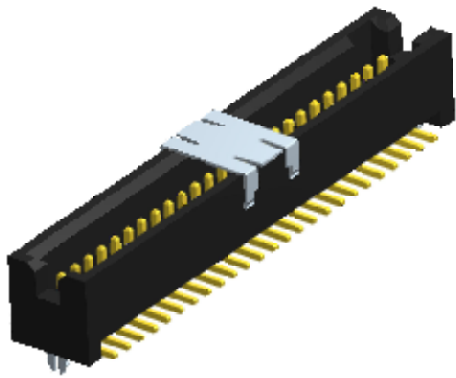


WITH CAP

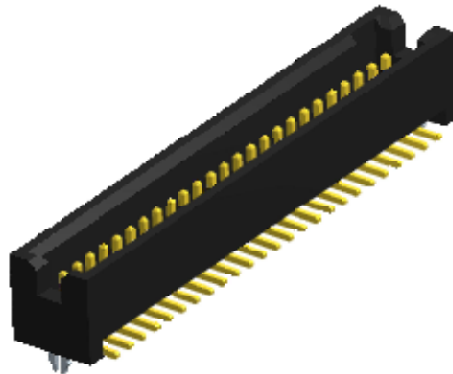

WITHOUT CAP

SURFACE MOUNT TYPE

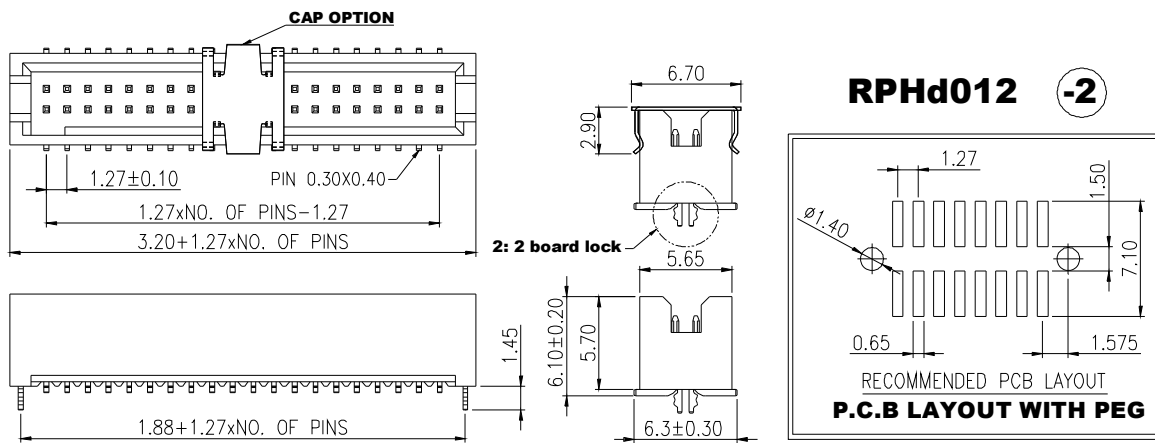

RPH	d	012	Pt	##	02	GX	2	CP
SHROUDED HEADER	PITCH 1.27x1.27 mm	SERIES NO. 012	PCB TYPE Pt: SURFACE MOUNT TYPE	NO. OF PINS PER ROW	NO. OF ROW 02	CONTACT PLATING OPTION	BOARD LOCK 2: 2 BOARD LOCK	CAP CP: WITH CAP

CONTACT PLATING OPTION

Gf: GOLD FLASH
 Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : STANDARD : NYLON 6T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm SHROUDED HEADER SURFACE MOUNT TYPE - Pt

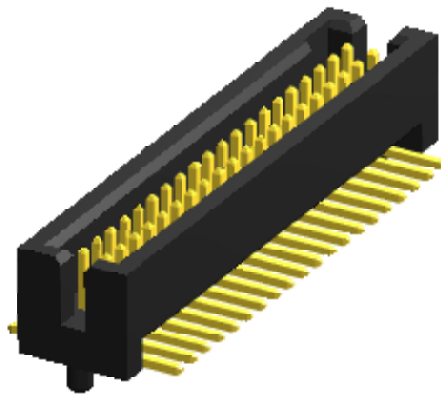

SURFACE MOUNT TYPE

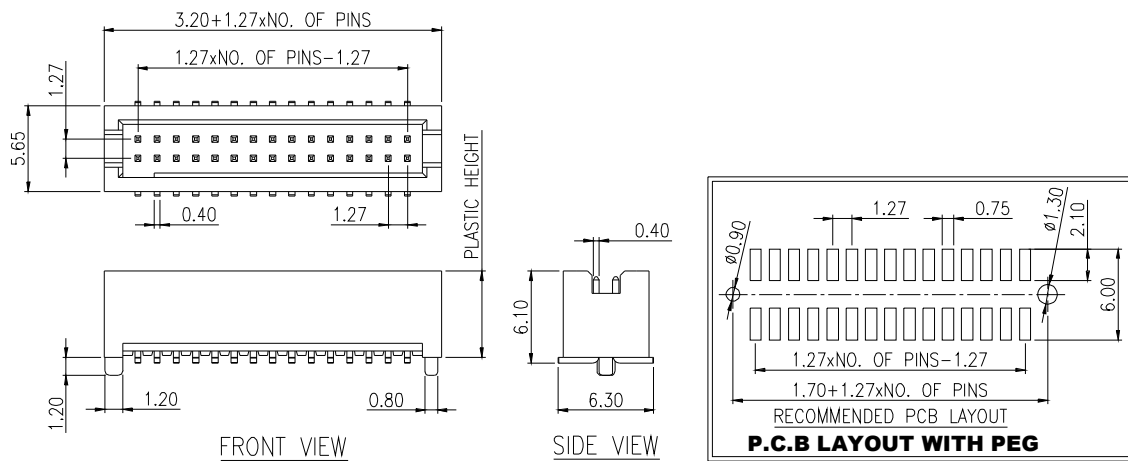

RPH SHROUDED HEADER PITCH 1.27x1.27 mm
d
XXXX SERIES NO. OVERALL LENGTH
Pt PCB TYPE Pt: SURFACE MOUNT TYPE
NO. OF PINS PER ROW
02 NO. OF ROW 02
GX
P PEG P: WITH PEG

SERIES NO.	OVERALL LENGTH	PLASTIC HEIGHT	SERIES NO.	OVERALL LENGTH	PLASTIC HEIGHT
004	7.50	7.30	011	12.00	11.50
005	9.50	9.00	012	12.70	12.20
006	6.10	5.70	013	14.60	14.10
007	5.80	5.70	014	15.70	15.20
008	11.20	10.70	015	16.10	15.60
009	11.50	11.00	730	7.30	7.30
010	11.70	11.20	1120	11.20	11.20

CONTACT PLATING OPTION

- Gf: GOLD FLASH
- Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
- G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
- G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
- G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS

MATERIALS


INSULATOR MATERIAL : STANDARD : NYLON 6T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm STACK SHROUDED HEADER STRAIGHT TYPE - P

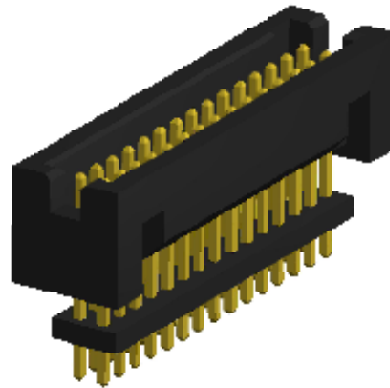


STRAIGHT TYPE

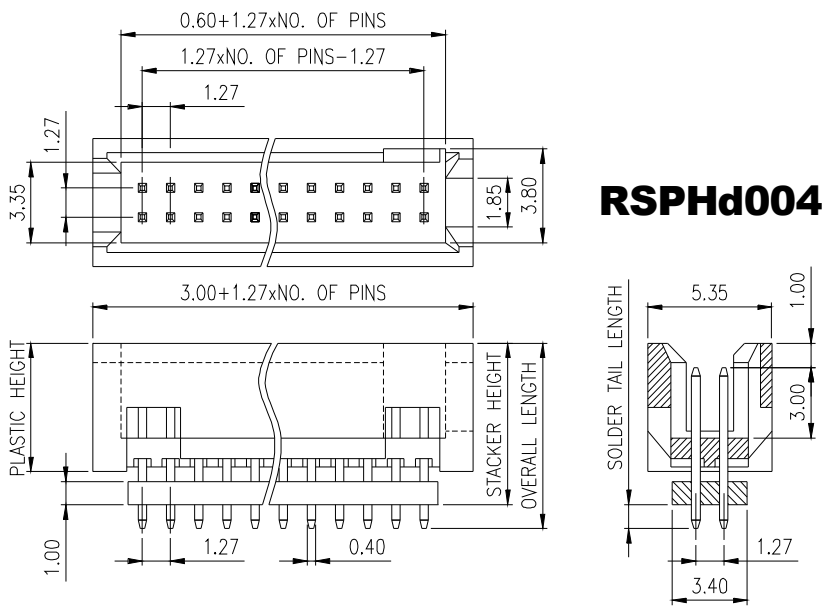

RSPHd004

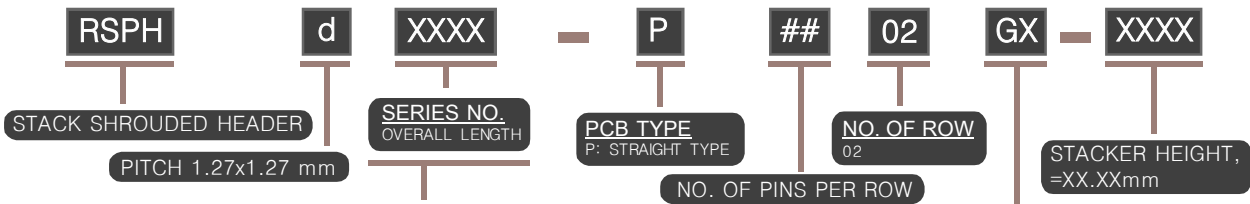

SERIES NO.	OVERALL LENGTH	PLASTIC HEIGHT	STACKER HEIGHT
004	19.40	5.40	17.00

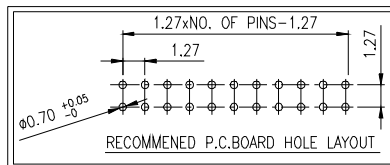

CONTACT PLATING OPTION
 Gf: GOLD FLASH
 Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE




1.27x1.27 mm STACK SHROUDED HEADER SURFACE MOUNT TYPE - Pt

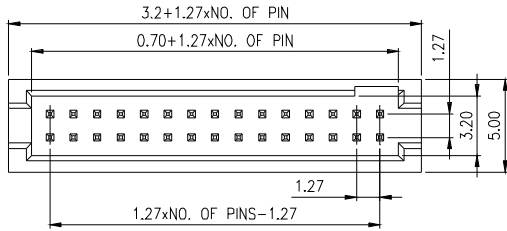


RSPHd003

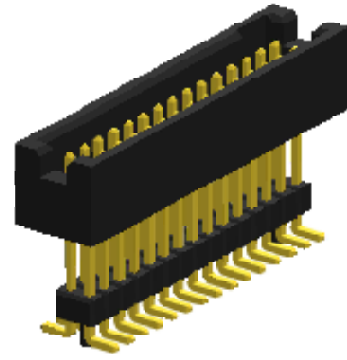





RSPHd003

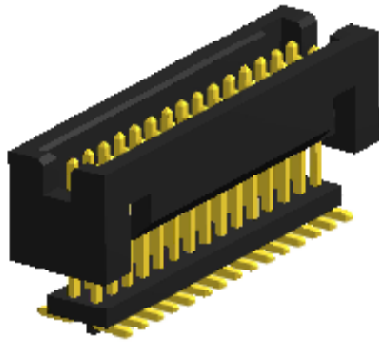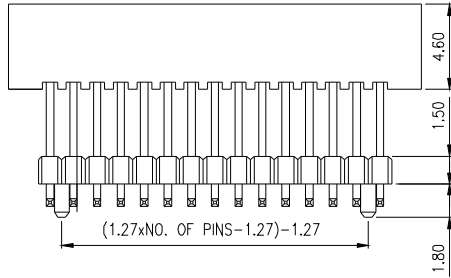

RSPHd004

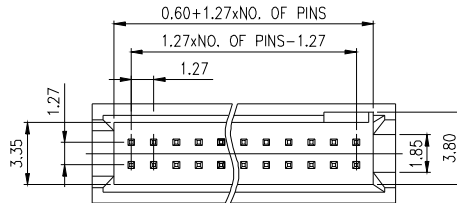

RSPHd004

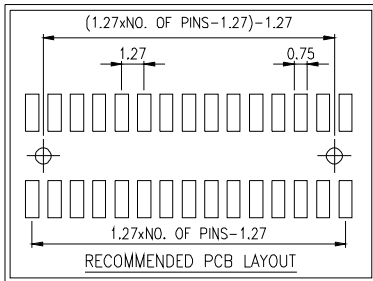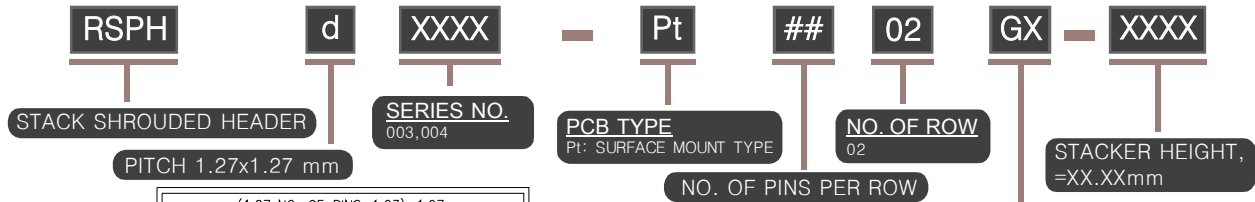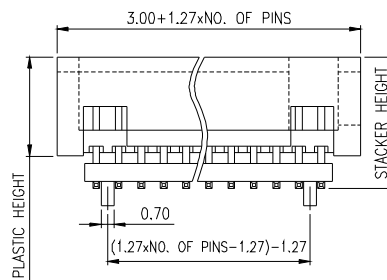

CONTACT PLATING OPTION
 Gf: GOLD FLASH
 Gf1: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS

CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS

INSULATOR MATERIAL : NYLON-6T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE