





MMI

PIN RECEPTACLE
PITCH: 1.27x2.54mm


1.27x2.54 mm HEADER RECEPTACLE STRAIGHT TYPE - P

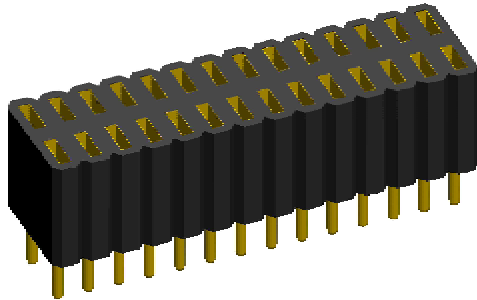


STRAIGHT TYPE




PRc001

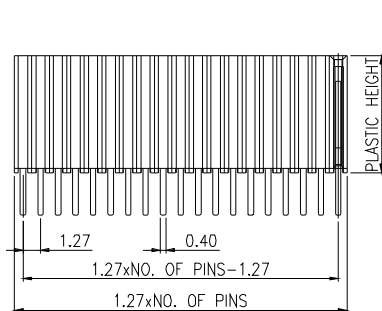


FRONT VIEW



SIDE VIEW

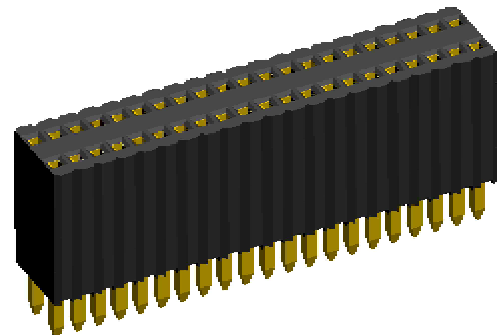


STRAIGHT TYPE



PRc003,004

PR	C	XXXX	-	P	##	0X	GX
HEADER RECEPTACLE PITCH 1.27x2.54 mm		SERIES NO. 001,003,004		PCB TYPE P: STRAIGHT TYPE		NO. OF ROW 01,02	CONTACT PLATING OPTION Gf: GOLD FLASH Grt: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
				NO. OF PINS PER ROW			

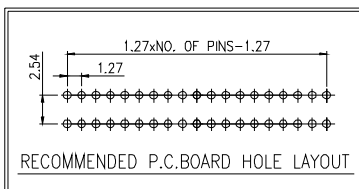

SPECIFICATIONS


CURRENT RATING : 1 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
CONTACT RESISTANCE: 20m OHM MAX.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : PHOSPHOR BRONZE

MATERIALS



INSULATOR MATERIAL : STANDARD : NYLON 6T
FINISH : GOLD FLASH ALL OVER
MAX. PROCESSING TEMP : 230° FOR 30 SECONDS

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x2.54 mm HEADER RECEPTACLE SURFACE MOUNT TYPE - Pt

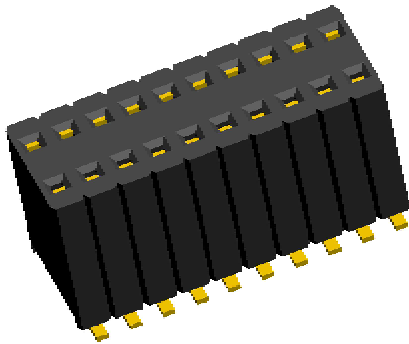

SURFACE MOUNT TYPE

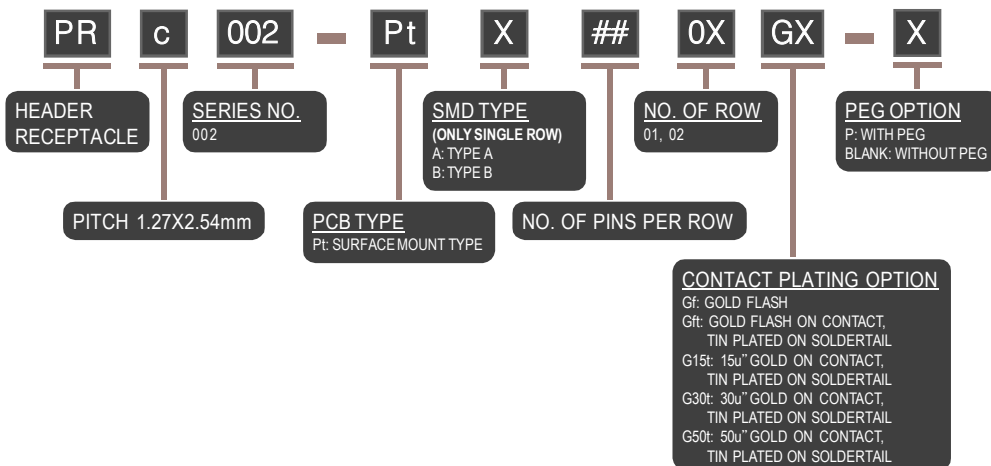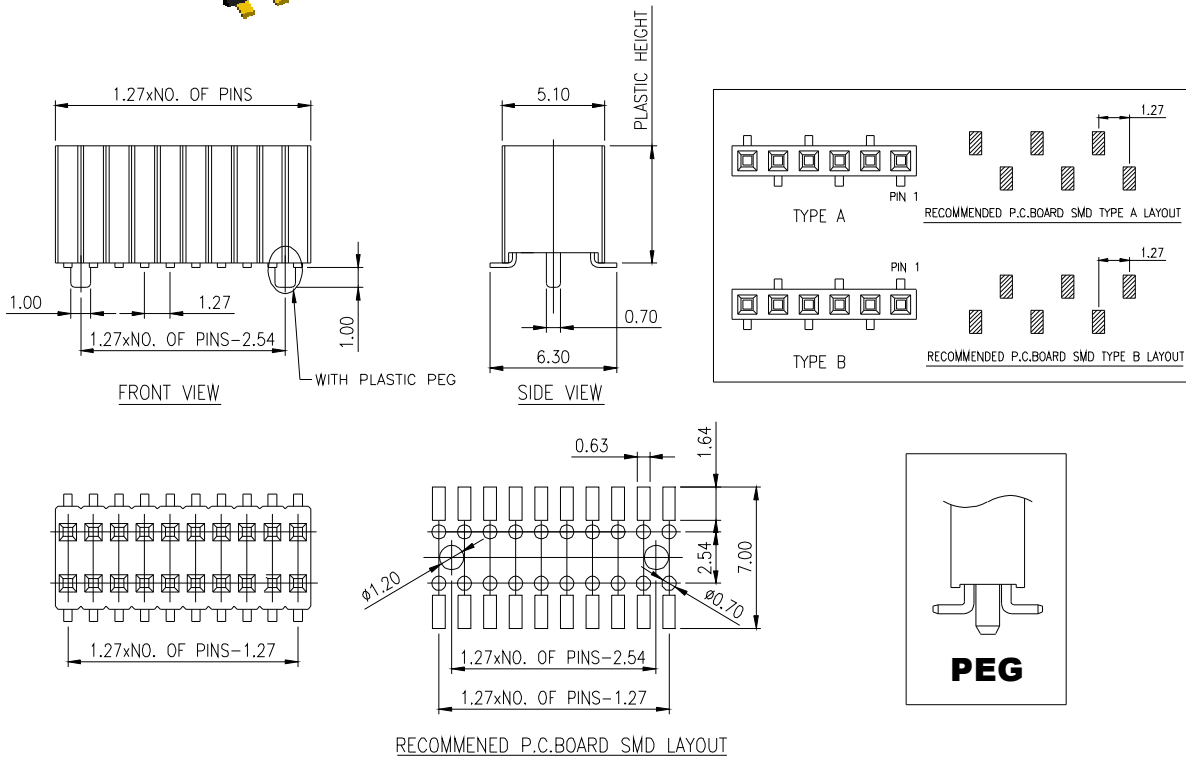

SPECIFICATIONS

CURRENT RATING : 1 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 CONTACT RESISTANCE : 20m OHM MAX.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : PHOSPHOR BRONZE

MATERIALS

INSULATOR MATERIAL : STANDARD : NYLON 6T
 FINISH : GOLD FLASH ALL OVER
 MAX. PROCESSING TEMP : 230° FOR 30 SECONDS

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE