



REVISIONS					
SYM	DISCRPTION	DATE	APPROVED	DISCRPTION	DATE
Δ	NOTE ROHS STANDARD	12/DEC/05	AARON	Δ	
Δ				Δ	

****CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!**



SPECIFICATIONS
VOLTAGE RATING : 250V AC, DC
CURRENT RATING : 3A, AC, DC
CONTACT RESISTANCE: INITIAL VALUE/ 10mOHM MAX.
 , AFTER ENVIRONMENTAL TESTING/ 20mOHM MAX.
WITHSTANDING VOLTAGE: 1000V AC/MINUTE
INSULATION RESISTANCE: 1000MEGOHMS min.
TEMPERATURE RANGE: -40°C ~ +85°C
BASE: NYLON 66 [UL94V-0]
CONTACT: BRASS, TIN PLATED

Recommended P.C.B. LAYOUT



ORDER INFORMATION:

MCd002-P04T
MC: WAFER SERIES, WAFER
α: PITCH: 2.54 mm
002: SERIES NO.
P: PCB TYPE, STRAIGH TYPE
04: NO. OF PIN
T: PLATING, TIN PLATING

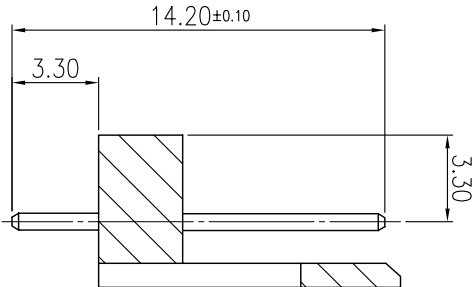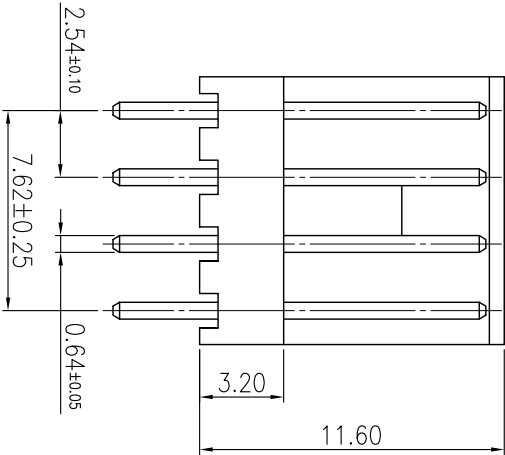

MATING			HOUSING	MCa002-XX-H	TERMINAL	MCa002-T
TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.30			SIGNATURES		DATE	MODEL WAFER
			DRAWN	PAUL	03/AUG/02"	
			CHECKED	ZOLA	03/AUG/02"	
SYMBOL	UNIT	SCALE	APPROVALS		NO.	
Δ	mm	5/1			MCa002-P04T	
MMT CORPORATION						

MMT CORPORATION