V1.1

REVISIONS							
SYM	DISCRIPTION	DATE	APPROVED	SYM	DISCRIPTION	DATE	APPROVED
△				△			
△				△			

**CUSTOMER DRAWING FOR REFERANCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!

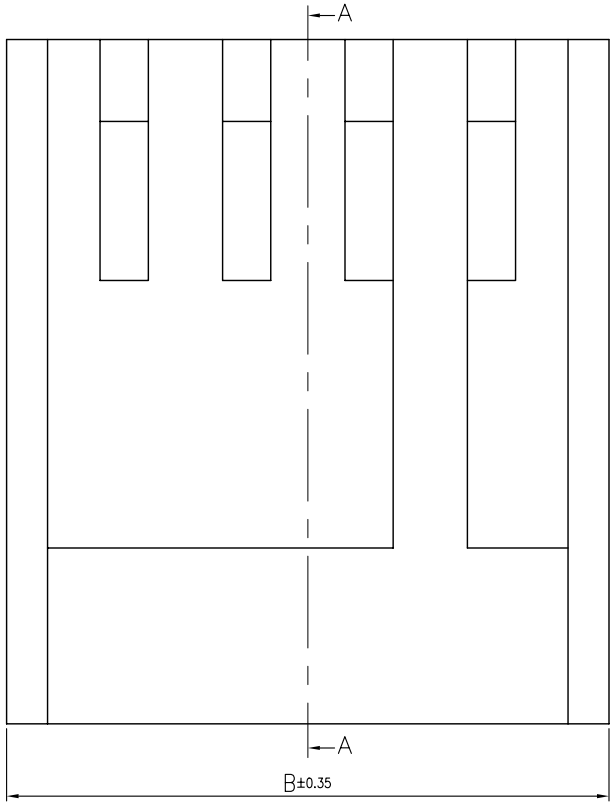

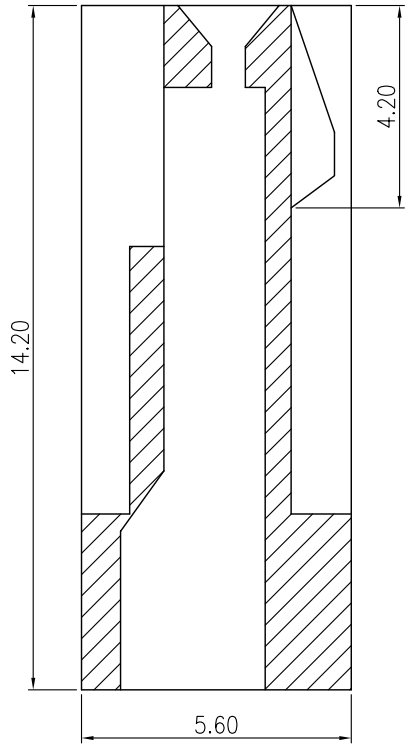

SECTION A–A

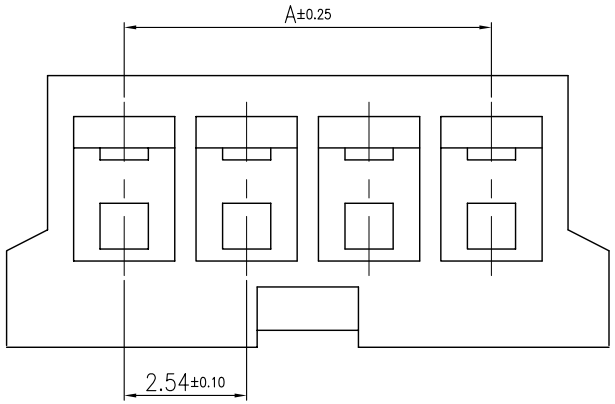

SPECIFICATIONS:
- VOLTAGE RATING: 250V AC. DC
- CURRENT RATING: 3A, AC, DC
- WITHSTAND VOLTAGE: 1000V AC / MINUTE
- INSULATION RESISTANCE: 1000m OHM MIN
- TEMPERATURE TATING: −25°C ~ +85°C
- (INCLUDING TEMPERATURE RISE IN APPLYING ELECTRIC AL CURRENT)
- APPLICABLE PC BOARD THICKNESS: 1.60 mm
- CONTACT RESISTANCE: INITIAL VALUE / 10m OHM MAX
- AFTER ENVIRONMENTAL TESTING / 20m OHM MAX

MATERIAL:
- CONTACT: BASS,TIN PLATING
- BASE: NYLON 66, UL 94V−0

Q'TY: 500, 1000 PCS / BAG

ORDER INFORMATION:
MCa002−XX−H
MC: WAFER SERIES
a: PITCH: 2.54 mm
00: SERIES NO.
H: HOUSING

PART NO.	CIRCUITS	DIMENSION	
		A	B
MCa002−02−H	2	2.54	7.30
MCa002−03−H	3	5.08	9.90
MCa002−04−H	4	7.62	12.50
MCa002−05−H	5	10.16	14.00
MCa002−06−H	6	12.70	17.40
MCa002−07−H	7	15.24	20.10
MCa002−08−H	8	17.78	22.20

MATING	WAFER	MCa002 SERIES	TERMINAL	MCa002−T
TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25	SIGNATURES		DATE	MODEL
	DRAWN	VIVI	29/JUN/03'	TITLE HOUSING
SYMBOL △ / UNIT mm / SCALE 10/1	CHECKED	ZOLA	29/JUN/03'	NO. MCa002−__−H
	APPROVALS			

MMT CORPORATION

TEL:(510)979−2188 www.mmtmachrone.com FAX:(510)979−2189