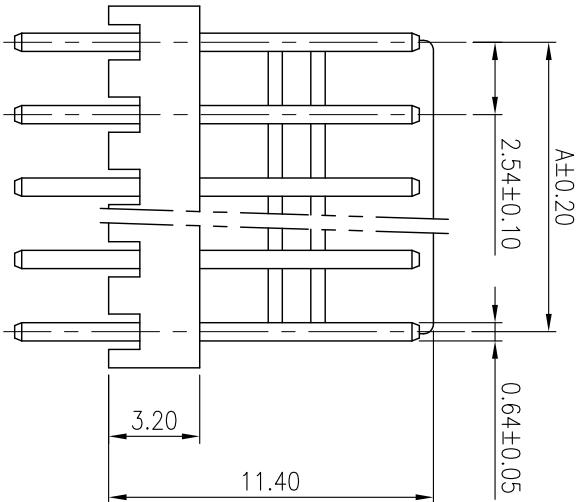
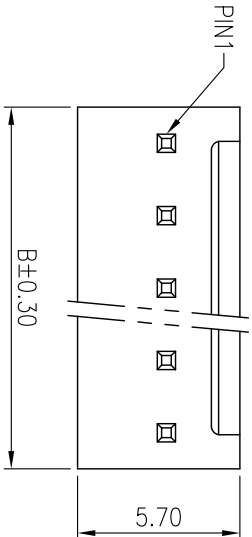


REVISIONS						
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
Δ				Δ		
Δ				Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						008

SPECIFICATIONS

VOLTAGE RATING: 125V AC/DC

CURRENT RATING: 3A AC/DC

WITHSTAND VOLTAGE: 1000V AC/MINUTE

INSULATION RESISTANCE: 1000MΩ MIN.

TEMPERATUR RANGE : -25°C~+85°C

CONTACT RESISTANCE : 20mΩ MAX

ORDER INFORMATION:

MC6003-PXXT

MC: WAFER SERIES, WAFER

α: PITCH: 2.54 mm

003: SERIES NO.

P: PCB TYPE, STRAIGHT

XX: NO. OF CONTACTS

T: PLATING, TIN PLATING

MATERIAL

CONTACT: BRASS, TIN PLATED

BASE: NYLON 66 UL94V-2;

Q'TY: 1000 PCS/BAG

MODEL NO.	POLE	DIMENSION	
		A	B
MC6003-P02T	2	2.54	5.08
MC6003-P03T	3	5.08	7.62
MC6003-P04T	4	7.62	10.16
MC6003-P05T	5	10.16	12.70
MC6003-P06T	6	12.70	15.24
MC6003-P07T	7	15.24	17.78
MC6003-P08T	8	17.78	20.32
MC6003-P09T	9	20.32	22.86
MC6003-P10T	10	22.86	25.40
MC6003-P11T	11	25.40	27.94
MC6003-P12T	12	27.94	30.48
MC6003-P13T	13	30.48	33.02
MC6003-P14T	14	33.02	35.56
MC6003-P15T	15	35.56	38.10

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	MODEL	
		DRAWN	AARON	06/DEC/11'	TITLE	
±0.25		CHECKED	PEGGY	06/DEC/11'	WAFER	
SYMBOL	UNIT	SCALE	APPROVALS		NO.	
Δ	mm	4/1			MC6003-P__T	