




0.70*1.70

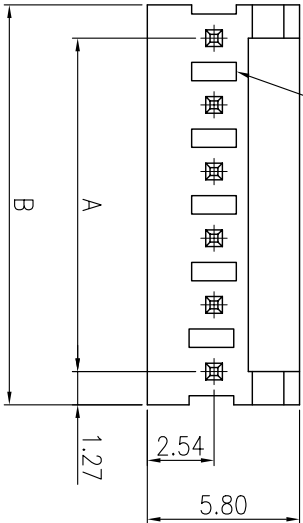

SPECIFICATIONS
POLES : 2 – 28
VOLTAGE RATING : 250V AC, DC
CURRENT RATING : 2A, AC, DC
WITHSTANDING VOLTAGE: 1000V AC/MINUTE
INSULATION RESISTANCE: 1000M Ω /HMS min.
TEMPERATURE RANGE: -25°C ~ +85°C

MATERIAL :
CONTACT : COPPER ALLOY, TIN PLATED
BASE : NYLON UL94V-0

ORDER INFORMATION:
MCd006-PXXT
MC: WAFER SERIES, WAFER
 α : PITCH: 2.54 mm
006: SERIES NO.
P: PCB TYPE, STRAIGH TYPE
XX: NO. OF PIN
T: PLATING, TIN PLATING

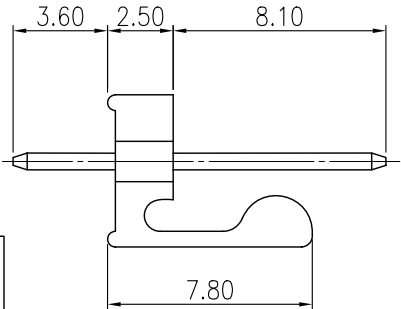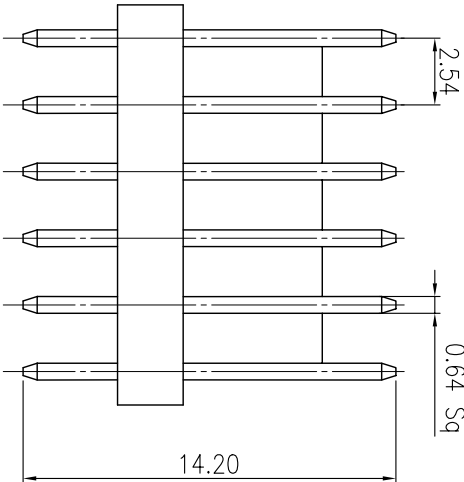

PART NO.	CIRCUITS	DIMENSION	
		A	B
MCd006-P02T	2	2.54	5.08
MCd006-P03T	3	5.08	7.62
MCd006-P04T	4	7.62	10.16
MCd006-P05T	5	10.16	12.70
MCd006-P06T	6	12.70	15.24
MCd006-P07T	7	15.24	17.78
MCd006-P08T	8	17.78	20.32
MCd006-P09T	9	20.32	22.86
MCd006-P10T	10	22.86	25.40
MCd006-P11T	11	25.40	27.94
MCd006-P12T	12	27.94	30.48
MCd006-P13T	13	30.48	33.02
MCd006-P14T	14	33.02	35.56
MCd006-P15T	15	35.56	38.10
MCd006-P16T	16	38.10	40.64
MCd006-P17T	17	40.64	43.18
MCd006-P18T	18	43.18	45.72
MCd006-P19T	19	45.72	48.26
MCd006-P20T	20	48.26	50.80
MCd006-P21T	21	50.80	53.34
MCd006-P22T	22	53.34	55.88
MCd006-P23T	23	55.88	58.42
MCd006-P24T	24	58.42	60.96
MCd006-P25T	25	60.96	63.50
MCd006-P26T	26	63.50	66.04
MCd006-P27T	27	66.04	68.58
MCd006-P28T	28	68.58	71.12

MATING		MCd006 HOUSING SERIES		TERMINAL		MODEL	
TOLERANCES UNLESS OTHERWISE SPECIFIED		IDC CONNECTOR Dcd101-FXXT				MCd006-T	
OTHERWISE SPECIFIED		SIGNATURES		DATE		TITLE	
±0.25		DRAWN TONY		26/NOV/02		WAFER	
SYMBOL		CHECKED ZOLA		26/NOV/02		NO.	
UNIT		APPROVALS				MCd006-P__T	
mm							
SCALE							
5/1							

MMT CORPORATION