
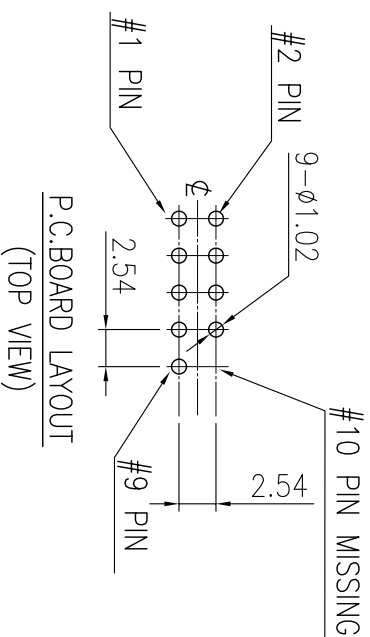
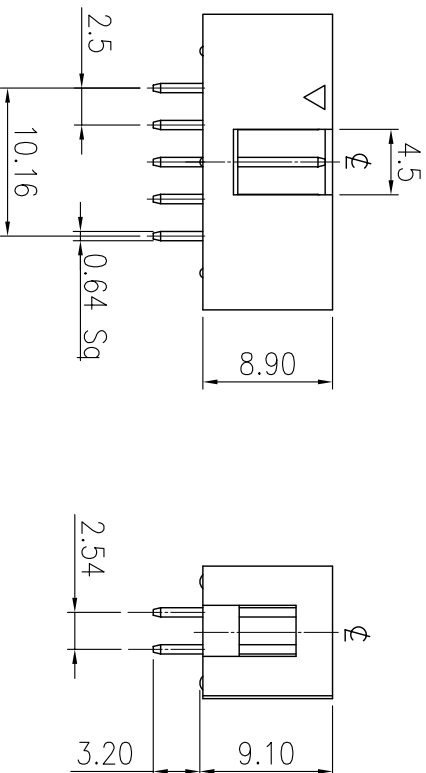


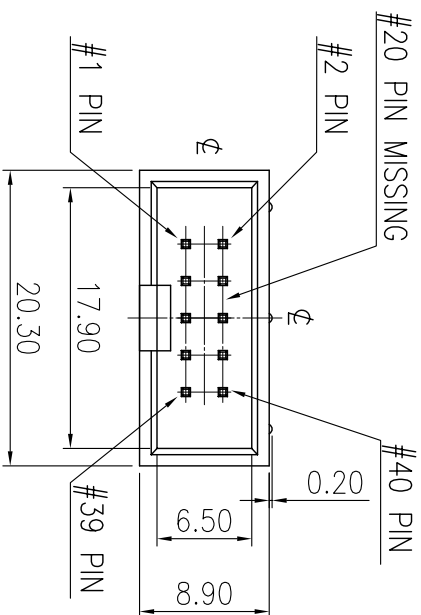

REVISIONS					1
SYM	DESCRIPTION	DATE	APPROVED	SYM	DATE
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					061

APPLICATION AND FEATURES

1. LOW-PROFILE PIN HEADERS ARE DESIGNED AS MATING DEVICES FOR THE I.D.C SOCKET.
2. ASSURES RELIABLE FLAT CABLE -TO-P.C.BOARD INTERCONNECTION.
3. FULLY SHROUDED.
4. NO EJECTOR LATCHES FOR SAVING SPACE.

SPECIFICATION

CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE: 5000MΩ MIN.
DIELECTRIC WITHSTANDING : AC 500V.
OPERATING TEMPERATURE: -40°C~+105°C.
CONTACT MATERIAL : BRASS
INSULATOR MATERIAL :
STANDARD : P.B.T
COLOR : YELLOW
FINISH : GOLD FLASH

ORDER INFORMATION:

RPHd000-P0502Gf-M10
RPH: SHROUDED HEADER
a: 2.54mmX2.54mm PITCH
000: SERIES NO.
P: PCB TYPE, STRAIGHT
05: NO. OF PINS PER ROW
02: DOUBLE ROW
Gf: TERMINAL PLATING, GOLD FLUSH
M10: #10 PIN MISSING

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25	DRAWN	AARON	02/MAR/06	SHROUDED HEADER		
SYMBOL	UNIT	SCALE	CHECKED	WENDY	02/MAR/06	NO.
Δ	mm	1/1	APPROVALS			RPHd000-P0502Gf-M10

MMT CORPORATION