

V1.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS							
SYM	DISCRPTION	DATE	APPROVED	SYM	DISCRPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							

APPLICATION AND FEATURES





1. LOW-PROFILE PIN HEADERS ARE DESIGNED AS MATING DEVICES FOR THE I.D.C SOCKET.
2. ASSURES RELIABLE FLAT CABLE -TO-P.C.BOARD INTERCONNECTION.
3. FULLY SHROUDED.
4. NO EJECTOR LATCHES FOR SAVING SPACE.

SPECIFICATION

CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE: 5000MΩ MIN.
DIELECTRIC WITHSTANDING : AC 500V.
OPERATING TEMPERATURE: -40°C~+105°C.
CONTACT MATERIAL : BRASS
INSULATOR MATERIAL :
STANDARD : P.B.T
COLOR : YELLOW
FINISH : GOLD FLASH

ORDER INFORMATION:

RPHd000-P1702Gf-M5
RPH: SHROUDED HEADER
a: 2.54mmX2.54mm PITCH
000: SERIES NO.
P: PCB TYPE, STRAIGHT
17: NO. OF PINS PER ROW
02: DOUBLE ROW
Gf: TERMINAL PLATING, GOLD FLUSH
M5: #5 PIN MISSING

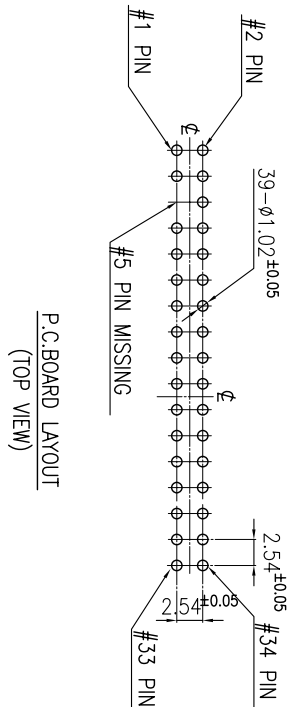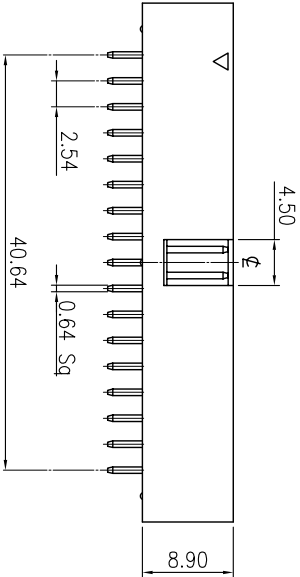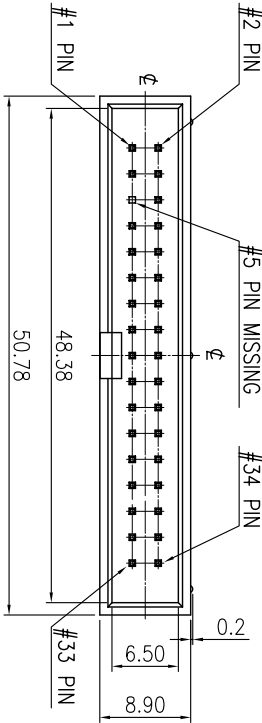

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.30		SIGNATURES		DATE		MODEL	
		DRAWN	VMI	24/APR/03	TITLE	SHROUDED HEADER	
SYMBOL	UNIT	SCALE	CHECKED	ZOLA	24/APR/03	NO.	
Δ	mm	2/1	APPROVALS			RPHd000-P1702Gf-M5	

MMT CORPORATION

TEL: (510) 979-2188

www.mtmachrone.com

FAX: (510) 979-2189