

V1.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS				1
SYM	DISCRPTION	DATE	APPROVED	SYM
Δ			Δ	
Δ			Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!				





APPLICATION AND FEATURES

1. LOW-PROFILE PIN HEADERS ARE DESIGNED AS MATING DEVICES FOR THE I.D.C SOCKET.
2. ASSURES RELIABLE FLAT CABLE -TO-P.C.BOARD INTERCONNECTION.
3. FULLY SHROUDED.
4. NO EJECTOR LATCHES FOR SAVING SPACE.

ORDER INFORMATION:
RPHd000-P2002Gf-M20
RPH: SHROUDED HEADER
a: 2.54mmX2.54mm PITCH
000: SERIES NO.
P: PCB TYPE, STRAIGHT
20: NO. OF PINS PER ROW
02: DOUBLE ROW
Gf: TERMINAL PLATING, GOLD FLUSH
M20: #20 PIN MISSING

SPECIFICATION
CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE: 5000MΩ MIN.
DIELECTRIC WITHSTANDING : AC 500V.
OPERATING TEMPERATURE: -40°C~+105°C.

CONTACT MATERIAL : BRASS
INSULATOR MATERIAL :
STANDARD : P.B.T
COLOR : YELLOW
FINISH : GOLD FLASH

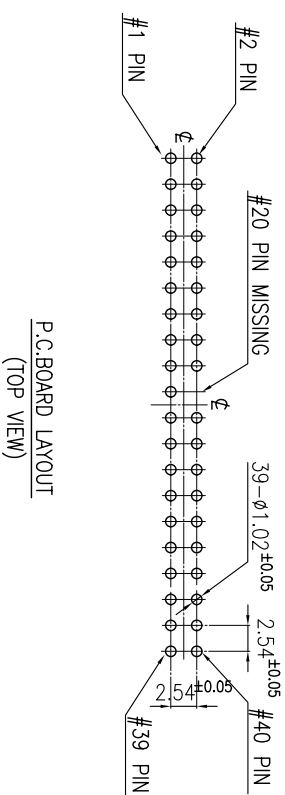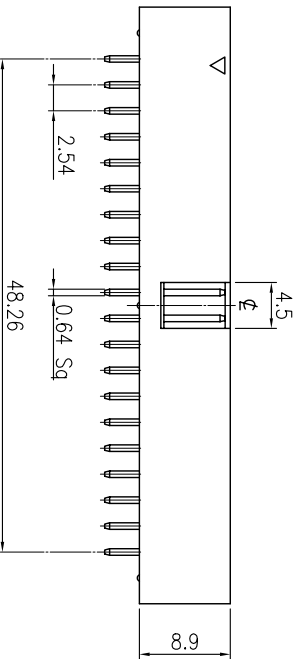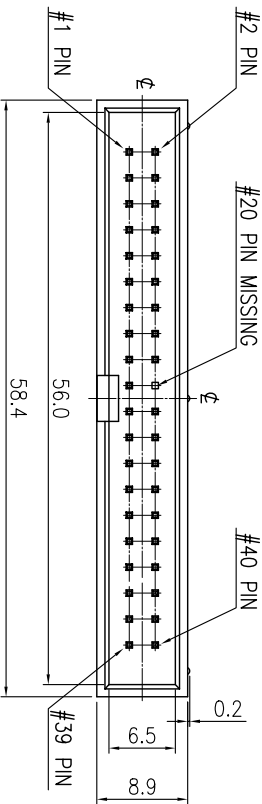

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.30		DRAWN	VVI	24/APR/03		SHROUDED HEADER	
CHECKED	ZOLA	24/APR/03					
SYMBOL	UNIT	SCALE	APPROVALS			NO.	
Δ	mm	2/1				RPHd000-P2002Gf-M20	

MMT CORPORATION

TEL: (510) 979-2188

www.mtmachrone.com

FAX: (510) 979-2189