

****CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!**


PLATING: GOLD FLASH OVER NICKEL UNDERPLATE OVERALL

DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC/MINUTE

MATING DURABILITY: 500 CYCLES MIN

RECOMMENDED SOLDERING TEMP: 250° FOR 5-10 SECOND

N: INSULATOR MATERIAL NY6T

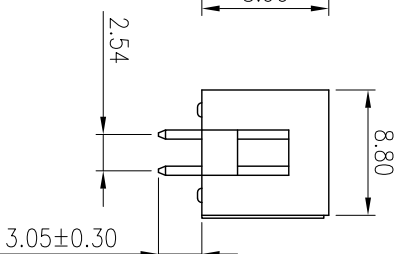

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE		MODEL	
SYMBOL △	UNIT mm	SCALE 2/1	DRAWN	AARON	19/NOV/18	TITLE SHROUDED HEADER		
			CHECKED	PING	19/NOV/18	NO. RPHd000-P__02GfN		
			APPROVALS					

MMT CORPORATION