

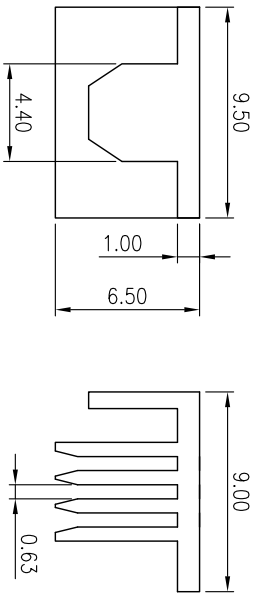
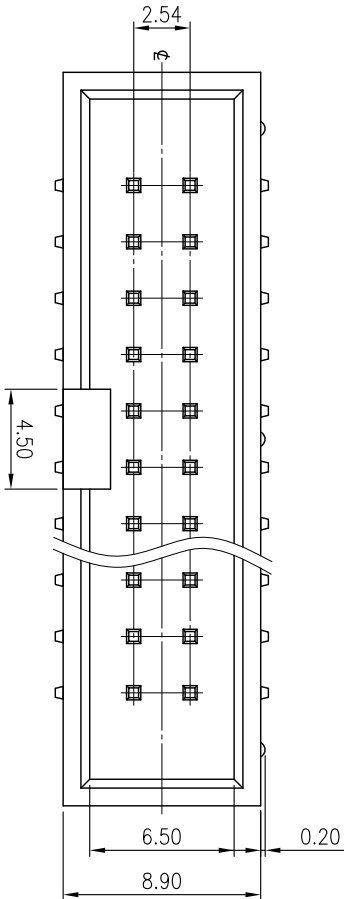


REVISIONS

SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							156



CAP

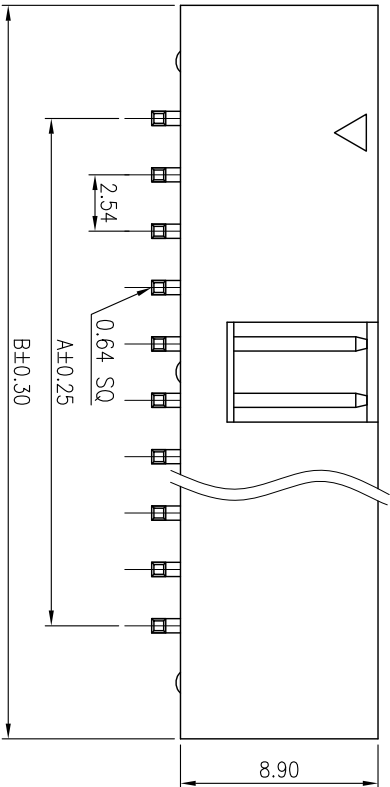


SPECIFICATION

CURRENT RATING: 3 AMPS.
INSULATOR RESISTANCE: 5000M OHM MIN.
DIELECTRIC WITHSTANDING: AC 500V.
OPERATING TEMPERATURE: -40~+105°
CONTACT MATERIAL: BRASS
INSULATOR MATERIAL
STANDARD: NYLAN-6T UL 94V-0
FINISH: GOLD FLASH OR SELECTIVE

APPLICATION AND FEATURES

1. LOW-PROFILE PIN HEADERS ARE DESIGNED AS MATING DEVICES FOR THE I.D.C SOCKET.
2. ASSURES RELIABLE FLAT CABLE -TO-P.C.BOARD INTERCONNECTION.
3. FULLY SHROUDED.
4. NO EJECTOR LATCHES FOR SPACE SAVING.

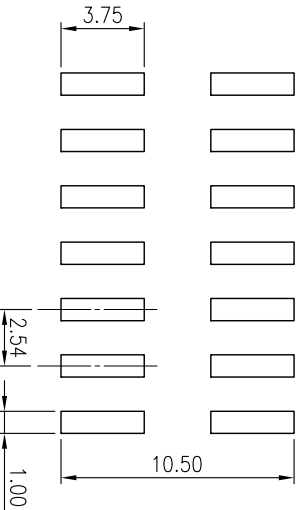

ORDER INFORMATION:

RPHd000-PtXX02Gf-CP-T/R
RPH: SHROUDED HEADER
α: 2.54mmX2.54mm PITCH
000: SERIES NO.
Pt: PCB TYPE, SURFACE MOUNT
XX: NO. OF PINS PER ROW
02: DOUBLE ROW
Gf: TERMINAL PLATING, GOLD FLASH
CP: WITH CAP(OPTION)
T/R: PACKING TYPE, TAPE & REEL(OPTION)

PART NO.	CIRCUITS	DIMENSION	
		A	B
RPHd000-Pt0302Gf-CP-T/R	2X3	5.08	15.30
RPHd000-Pt0402Gf-CP-T/R	2X4	7.62	17.88
RPHd000-Pt0502Gf-CP-T/R	2X5	10.16	20.30
RPHd000-Pt0602Gf-CP-T/R	2X6	12.70	22.89
RPHd000-Pt0702Gf-CP-T/R	2X7	15.24	25.43
RPHd000-Pt0802Gf-CP-T/R	2X8	17.78	27.97
RPHd000-Pt0902Gf-CP-T/R	2X9	20.32	30.51
RPHd000-Pt1002Gf-CP-T/R	2X10	22.86	33.05
RPHd000-Pt1102Gf-CP-T/R	2X11	25.40	35.59
RPHd000-Pt1202Gf-CP-T/R	2X12	27.94	38.13
RPHd000-Pt1302Gf-CP-T/R	2X13	30.48	40.67
RPHd000-Pt1402Gf-CP-T/R	2X14	33.02	43.21
RPHd000-Pt1502Gf-CP-T/R	2X15	35.56	45.75
RPHd000-Pt1602Gf-CP-T/R	2X16	38.10	48.29
RPHd000-Pt1702Gf-CP-T/R	2X17	40.64	50.83
RPHd000-Pt1802Gf-CP-T/R	2X18	43.18	53.37
RPHd000-Pt1902Gf-CP-T/R	2X19	45.72	55.91
RPHd000-Pt2002Gf-CP-T/R	2X20	48.26	58.45
RPHd000-Pt2102Gf-CP-T/R	2X21	50.80	60.99
RPHd000-Pt2202Gf-CP-T/R	2X22	53.34	63.53
RPHd000-Pt2302Gf-CP-T/R	2X23	55.88	66.07
RPHd000-Pt2402Gf-CP-T/R	2X24	58.42	68.61
RPHd000-Pt2502Gf-CP-T/R	2X25	60.96	71.15
RPHd000-Pt2602Gf-CP-T/R	2X26	63.50	73.69
RPHd000-Pt2702Gf-CP-T/R	2X27	66.04	76.23
RPHd000-Pt2802Gf-CP-T/R	2X28	68.58	78.77
RPHd000-Pt2902Gf-CP-T/R	2X29	71.12	81.31
RPHd000-Pt3002Gf-CP-T/R	2X30	73.66	83.85
RPHd000-Pt3102Gf-CP-T/R	2X31	76.20	86.39
RPHd000-Pt3202Gf-CP-T/R	2X32	78.74	88.93

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.25		DRAWN	AARON	18/AUG/11		SHROUDED HEADER	

SYMBOL	UNIT	SCALE	CHECKED	PEGGY	APPROVALS	NO.	RPHd000-Pt__02Gf-CP-T/R
Δ	mm	3/1					

MMT CORPORATION